

HOFFER

Perfecting Measurement™



Запасные части и комплектующие турбинных расходомеров серии НО

Технические характеристики

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93


Единый адрес для всех регионов: hfr@nt-rt.ru || www.hoffer.nt-rt.ru

TECHNICAL DATA SHEET

Replacement Parts and Calibrated Internals

Hoffer turbine flowmeters are easily repaired in the field with a minimum number of tools. A spare complete set of calibrated internals can provide nearly continuous operation of a flowmeter that has been damaged or needs to be recalibrated, and are available in all sizes. Calibrated kits are supplied with a NIST traceable calibration data sheet. For detailed technical information, refer to the "Hoffer Engineering Guide". When ordering replacement or spare parts, please provide the Hoffer model number or serial number of the original unit.


Component Exploded View

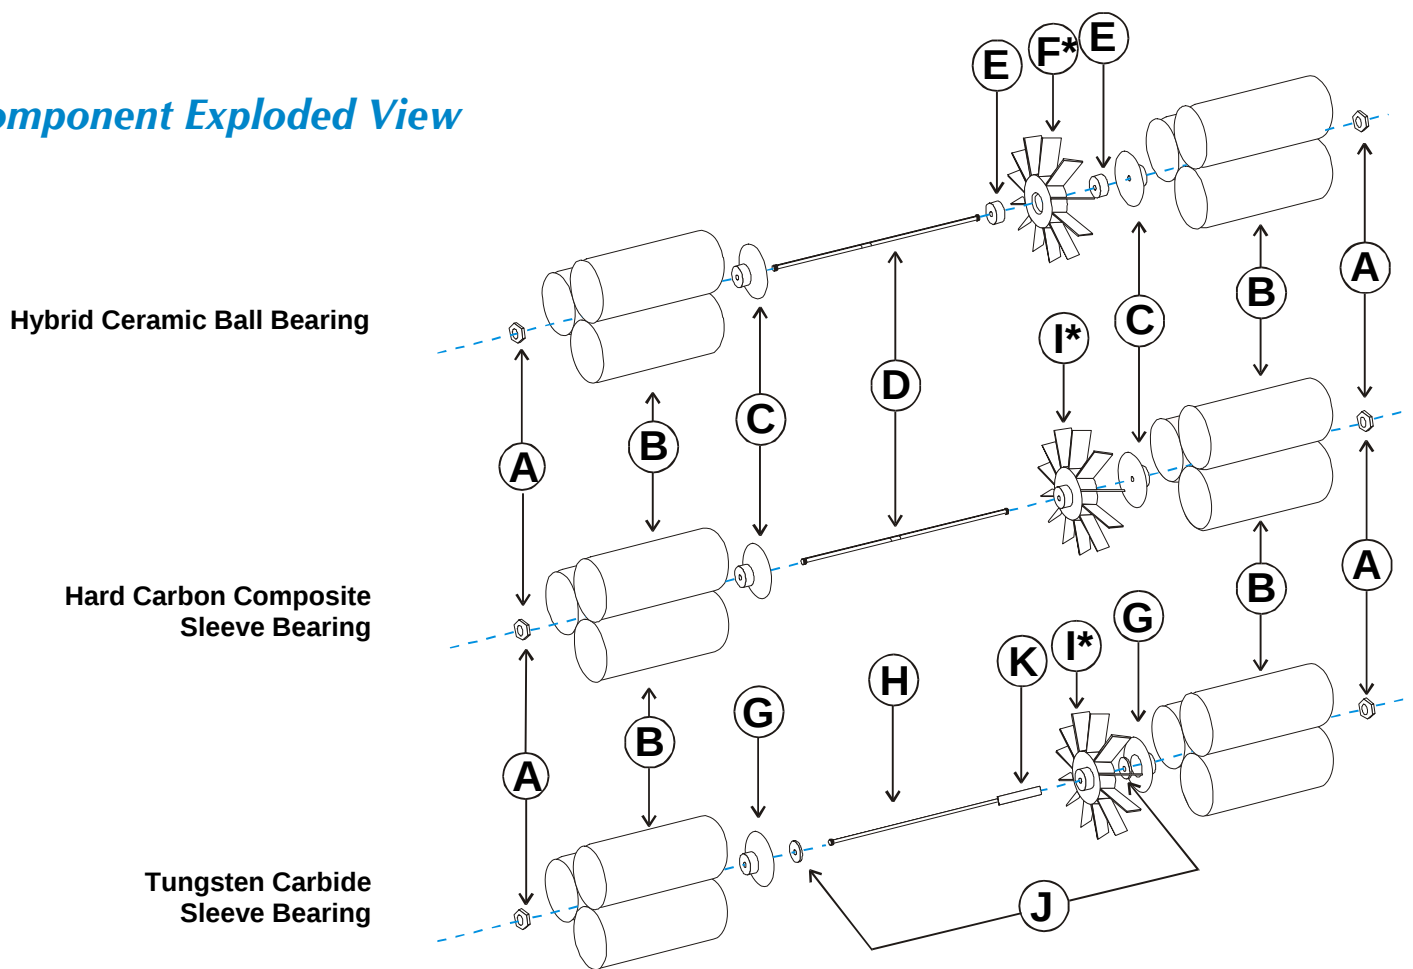

KEY

A—Lock Nut
 B—Flow Straightener (hangers)
 C—Cone
 D—Shaft
 E—Bearings
 F—Rotor

G—Cone
 H—Shaft
 I—Bushing & Rotor (Press Fit at Factory)
 J—T/C Washers
 K—Journal

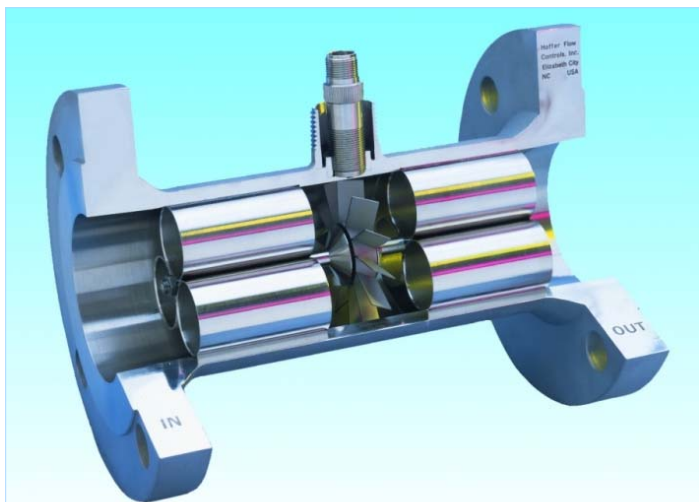

Note : Calibrated kits are supplied with calibration data sheet.

HO Series Calibrated Spare or Replacement Internal Kits

MODEL HO	-	-	-	-	-	INTERNALS
Flowmeter Size						
Minimum Flow Range						
Maximum Flow Range						
Bearing Type						
CB	- Ceramic Hybrid self-lubricating ball bearings.					
T	- Tungsten Carbide.					
TFE	- Teflon.					
C	- Hard Carbon Composite.					

Spare and Replacement Pickup Coils

Part No.	Description or Service	Temperature Rating
MC3PAE	RF Coil 1/2" MNPT & 3" Leads	-325° to +325°F
MC3PA	RF Coil All HO Series	-325° to +325°F
PC13-110G	Cryogenic HO 1 & Up	-450° to +450°F
PC13-74G	WECO HO 2x2 & HO 3x3 Liquid & Navy	-450° to +450°F
PC13-74S	HO Series HO1 & UP & Mini-Flows	-450° to +450°F
PC24-45G	HO1/4 thru HO3/4 Cryogenic, Trident & SY100	-450° to +450°F
PC24-45S	HO1/4 thru HO 3/4 & HO1 & Larger Gas	-450° to +450°F
PC24-45EX	HO1/4 thru HO 3/4 & HO1 & Larger Gas with 1/2" MNPT & 3" Leads	-450° to +450°F
PC28-13G	High Temp High Drag	-450° to +850°F
PC3-24G	Reluctance Center Mag for All Teflon	+35° to +120°F
PC24-92G	Hydrogen Vacuum Jacket	-450° to +450°F
PC28-14G	High Temp Low Drag	-450° to +850°F
PC3-24EX	Reluctance Teflon Series with 1/2" MNPT & 3" Leads	+35° to +120°F
MC2PAHT	High Temp RF with 3' Leads	-450° to +450°F

Part No.	Description or Service	Temperature Rating
MC2PA	High Temp 2 Pin RF	-150° to +330°F
PC13-108G	Cryogenic 1" & Larger	-450° to +450°F
PC24-113G	WECO HO2x1 & HO2x1½ Liquid and Gas	-450° to +450°F
PC13-74EX	Hi Drag with 1/2" MNPT & 3" Leads	-450° to +450°F
PC13-74S	Cryogenic 1" & Larger	-450° to +450°F
RF-4	WECO's All Sizes Requiring RF	-325° to +325°F
ISM-001	Intrinsic Mag Hi Drag 1" & Up & Mini-Flow Use	-97° to +207°F
PC24-123G	WECO HO2x2 & HO3x3 Gas	-450° to +450°F
ISM-003	Intrinsic Mag Low Drag 3/4" & Smaller Use	-97° to +207°F
ISM-006	Intrinsic Reluctance for All Teflon Use	+35° to +120°F
PC28-38G	Hi Temp/Hi Drag for WECO HO 2x1½ & HO2x1	-450° to +850°F
PC3-33G	Reluctance Teflon Hi Output	+35° to +120°F
HE01S	Hall Effect Coil for HOG	-40° to +302°F
M-L3/8X1.52	Lo-Co Coil	-50° to +250°F



The quality system covering the design, manufacture and testing of our products is certified to international Standard ISO 9001.



По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: hfr@nt-rt.ru || www.hoffer.nt-rt.ru



HOFFER FLOW CONTROLS, INC.

The specifications contained herein are subject to change without notice and any user of said specifications should verify from the manufacturer that the specifications are currently in effect. Otherwise, the manufacturer assumes no responsibility for the use of specifications which may have been changed and are no longer in effect.

The quality system covering the design, manufacture and testing of our products is certified to International Standard ISO 9001.

